

## Features

- Ultra High Efficiency (Up to 93.5%)
- Programmable Constant-Current Output
- 0-10V/PWM/Timer Dimmable and Dim-to-Off
- Standby Power  $\leq 1$  W
- Input surge protection: 4kV line-line, 6kV line-earth
- All-Around Protection: OVP, SCP, OTP
- Waterproof (IP67)
- SELV Output
- Suitable for Independent Use



## Description

The EUD-200SxxxDV series is a 200W, constant-current, programmable LED driver that operates from 90-305 Vac input with excellent power factor. Created for high bay, high mast, arena and roadway lights, it provides a dim-to-off mode with low standby power. The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, output over voltage, short circuit, and over temperature.

## Models

Max. Output Current	Input Voltage Range(1)	Output Voltage Range	Max. Output Power	Typical Efficiency (2)	Power Factor		Model Number (3)
					120Vac	220Vac	
700 mA	90 ~ 305 Vac 127~250 Vdc	143~286Vdc	200 W	93.5%	0.99	0.96	EUD-200S070DV
1050 mA	90 ~ 305 Vac 127~250 Vdc	95~190Vdc	200 W	93.5%	0.99	0.96	EUD-200S105DV
1400 mA	90 ~ 305 Vac 127~250 Vdc	71~142Vdc	200 W	93.0%	0.99	0.96	EUD-200S140DV
2100 mA	90 ~ 305 Vac 127~250 Vdc	47~ 95 Vdc	200 W	93.0%	0.99	0.96	EUD-200S210DV <sup>(4)</sup>
2450 mA	90 ~ 305 Vac 127~250 Vdc	41~ 82 Vdc	200 W	93.5%	0.99	0.96	EUD-200S245DV <sup>(4)</sup>
2800 mA	90 ~ 305 Vac 127~250 Vdc	35~ 71 Vdc	200 W	92.5%	0.99	0.96	EUD-200S280DV <sup>(4)</sup>
4200 mA	90 ~ 305 Vac 127~250 Vdc	24~ 48 Vdc	200 W	93.0%	0.99	0.96	EUD-200S420DV <sup>(4)</sup>
4900 mA	90 ~ 305 Vac 127~250 Vdc	21~ 41 Vdc	200 W	92.0%	0.99	0.96	EUD-200S490DV <sup>(4)</sup>

- Notes:** (1) Certified input voltage range: 100-240Vac or 127-250Vdc  
 (2) Measured at full load and 220 Vac input.  
 (3) All the models are certificated to KS, except EUD-200S070DV  
 (4) SELV Output

## Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input Voltage	90 Vac	-	305 Vac	127~250 Vdc
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.7 mA	IEC60598-1; 240Vac/ 60Hz, grounding effectively
Input AC Current	-	-	2.4 A	Measured at full load and 100 Vac input.
	-	-	1.2 A	Measured at full load and 220 Vac input.
Inrush Current(I <sup>2</sup> t)	-	-	3.2 A <sup>2</sup> s	At 220Vac input, 25°C cold start, duration=1.7 ms,10%Ipk-10%Ipk. See Inrush Current Waveform for the details.
PF	0.90	-	-	At 100-277Vac, 75%-100%Load (150-200W)
THD	-	-	20%	

## Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%Iomax	-	5%Iomax	At full load condition
Output Current Setting(lose) Range	10%Iomax	-	100%Iomax	
Total Output Current Ripple (pk-pk)	-	5%Iomax	10%Iomax	At full load condition, 20 MHz BW
Output Current Ripple at < 200 Hz (pk-pk)	-	2%Iomax	-	At full load condition. Only this component of ripple is associated with visible flicker.
Startup Overshoot Current	-	-	10%Iomax	At full load condition
No Load Output Voltage				
EUD-200S070DV	-	-	305V	
EUD-200S105DV	-	-	205V	
EUD-200S140DV	-	-	155V	
EUD-200S210DV	-	-	110V	
EUD-200S245DV	-	-	95V	
EUD-200S280DV	-	-	80V	
EUD-200S420DV	-	-	55V	
EUD-200S490DV	-	-	48V	
Line Regulation	-	-	±0.5%	Measured at full load
Load Regulation	-	-	±1.5%	
Turn-on Delay Time	-	0.8 s	1.5 s	Measured at 120Vac and 220Vac input.
Temperature Coefficient of Iomax	-	-	0.03%/°C	Case temperature = 0°C ~Tc max
12V Auxiliary Output Voltage	10.8 V	12 V	13.2 V	
12V Auxiliary Output Source Current	0 mA	-	200 mA	Return terminal is "Dim"

**Note:** All specifications are typical at 25 °C unless otherwise stated.

## General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 120 Vac input: EUD-200S070DV EUD-200S105DV EUD-200S140DV EUD-200S210DV EUD-200S245DV EUD-200S280DV EUD-200S420DV EUD-200S490DV	88.0% 88.0% 87.0% 87.0% 88.0% 86.0% 87.5% 87.0%	91.0% 91.0% 90.0% 90.0% 91.0% 89.0% 90.5% 90.0%	- - - - - - - -	Measured at full load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Efficiency at 220 Vac input: EUD-200S070DV EUD-200S105DV EUD-200S140DV EUD-200S210DV EUD-200S245DV EUD-200S280DV EUD-200S420DV EUD-200S490DV	91.5% 91.5% 91.0% 91.0% 91.5% 90.5% 91.0% 90.0%	93.5% 93.5% 93.0% 93.0% 93.5% 92.5% 93.0% 92.0%	- - - - - - - -	Measured at full load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Efficiency at 277 Vac input: EUD-200S070DV EUD-200S105DV EUD-200S140DV EUD-200S210DV EUD-200S245DV EUD-200S280DV EUD-200S420DV EUD-200S490DV	92.0% 91.5% 91.0% 91.0% 91.5% 91.0% 91.5% 90.5%	94.0% 93.5% 93.0% 93.0% 93.5% 93.0% 93.5% 92.5%	- - - - - - - -	Measured at full load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Standby power	-	-	1 W	Measured at 230Vac/50Hz; Dimming off
MTBF	-	341,000 Hours	-	Measured at 220Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F)
Lifetime	-	120,000 Hours	-	Measured at 220Vac input, 80%Load and 60°C case temperature; See lifetime vs. Tc curve for the details
Operating Case Temperature for Safety Tc_s	-40°C	-	+90°C	
Operating Case Temperature for Warranty Tc_w	-40°C	-	+70°C	
Storage Temperature	-40°C	-	+85°C	Humidity: 5%RH to 100%RH
Dimensions Inches (L × W × H) Millimeters (L × W × H)	8.82 × 2.66 × 1.56 224 × 67.5 × 39.5			With mounting ear 9.88 × 2.66 × 1.56 251 × 67.5 × 39.5
Net Weight	-	1200 g	-	

**Note:** All specifications are typical at 25 °C unless stated otherwise.

## Dimming Specifications

Parameter	Min.	Typ.	Max.	Notes
Absolute Maximum Voltage on the Vdim (+) Pin	-20 V	-	20 V	
Source Current on Vdim (+)Pin	200 uA	300 uA	450 uA	Vdim(+) = 0 V
Dimming Output Range	10%Iomax	-	100%Ioset	10%Iomax ≤ Ioset ≤ 100%Iomax
Recommended Dimming Input Range	0 V	-	10 V	Default 0-10V dimming mode.
Dim off Voltage	0.3 V	0.5 V	0.7 V	
Dim on Voltage	0.5 V	0.7 V	0.9 V	
Hysteresis	-	0.2 V	-	
PWM_in High Level	3 V	-	10 V	Dimming mode set to PWM in PC interface.
PWM_in Low Level	-0.3 V	-	0.6 V	
PWM_in Frequency Range	200 Hz	-	3 KHz	
PWM_in Duty Cycle	1%	-	99%	
PWM Dimming off (Positive Logic)	3%	5%	8%	
PWM Dimming on (Positive Logic)	5%	7%	10%	
PWM Dimming off ( Negative Logic)	92%	95%	97%	
PWM Dimming on ( Negative Logic)	90%	93%	95%	
Hysteresis	-	2%	-	

**Note:** All specifications are typical at 25 °C unless stated otherwise.

## Safety & EMC Compliance

Safety Category	Standard
CE	EN 61347-1, EN61347-2-13
KS	KS C 7655 : 2011
EMI standards	Notes
EN 55015 <sup>(1)</sup>	Conducted emission Test & Radiated emission Test
EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
EMS standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT


## Safety & EMC Compliance(Continued)

EMS standards	Notes
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 4 kV, line to earth 6 kV <sup>(2)</sup>
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment


**Note:** (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.

(2) To perform electric strength (hi-pot) testing, the “GDT ground disconnect” (nut and metal lock sheet) on the driver end-cap should be removed temporarily to prevent the internal gas discharge tube from conducting (as allowed by IEC 60598-1 Clause 10.2). After testing is completed, these items must be reinstalled to restore line-to-earth surge protection and secure the end cap.

## Lifetime vs. Case Temperature

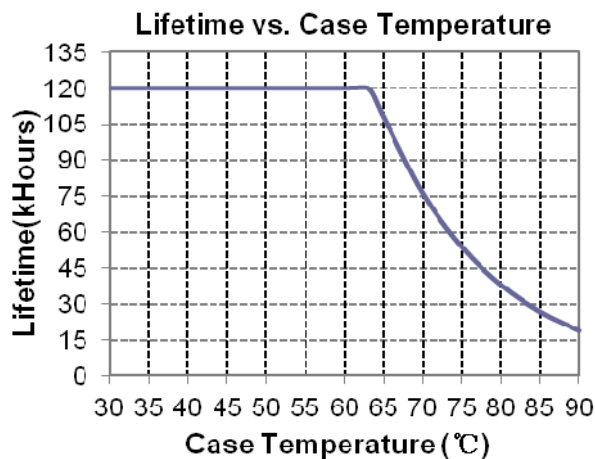


## Inrush Current Waveform

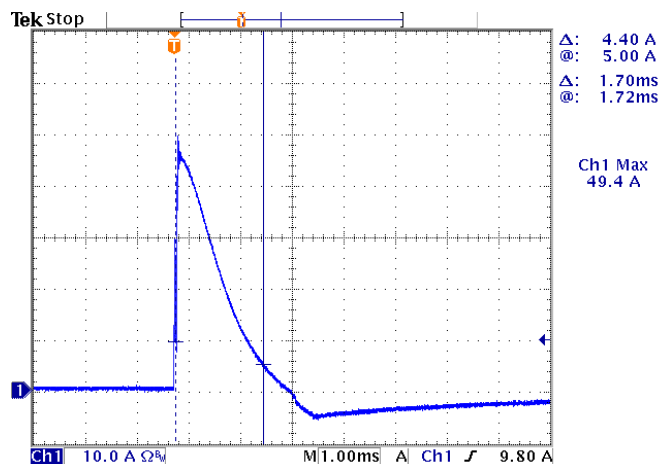

## Efficiency vs. Load


EUD-200S070DV

Efficiency vs. Output Voltage

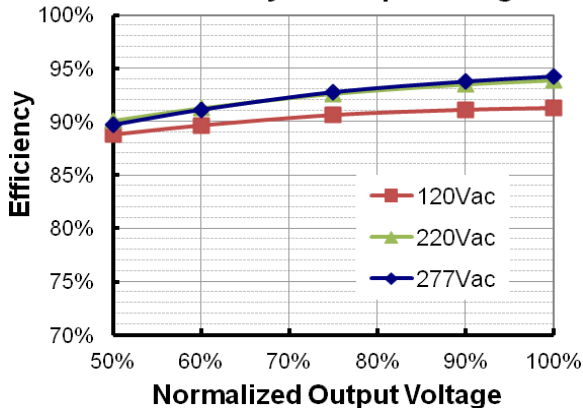


EUD-200S105DV

Efficiency vs. Output Voltage

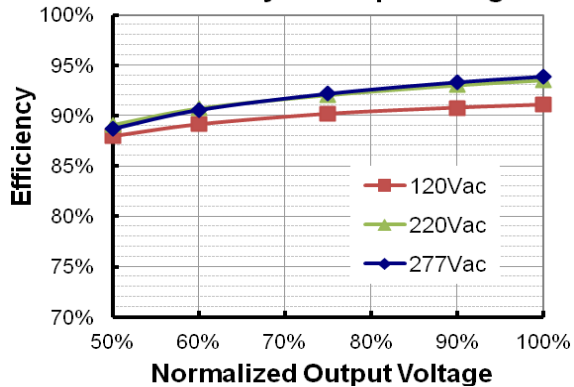


EUD-200S140DV

Efficiency vs. Output Voltage

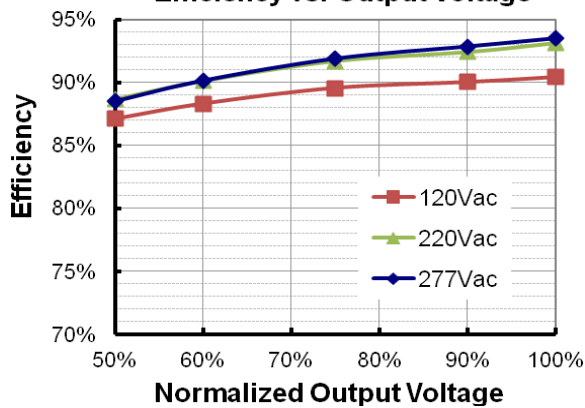


EUD-200S210DV

Efficiency vs. Output Voltage

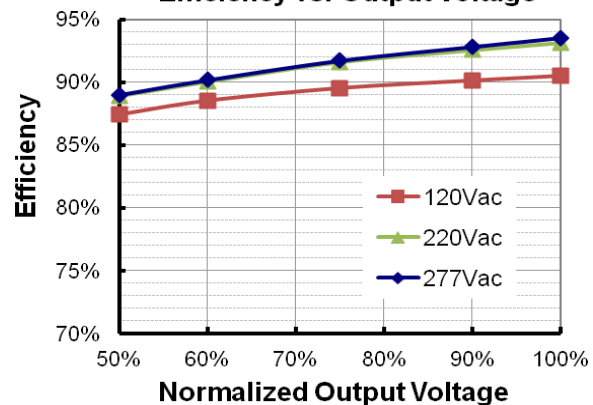


EUD-200S245DV



Efficiency vs. Output Voltage

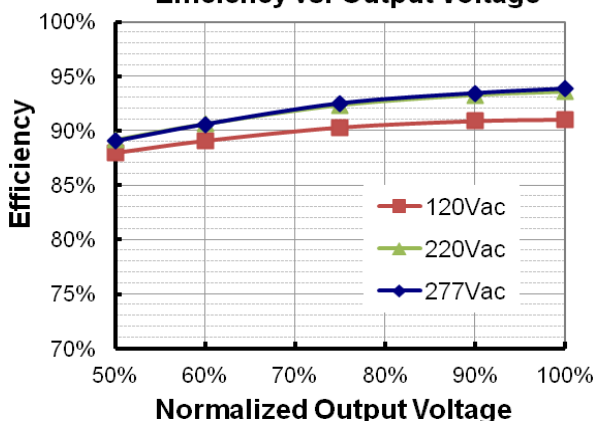


EUD-200S280DV

Efficiency vs. Output Voltage

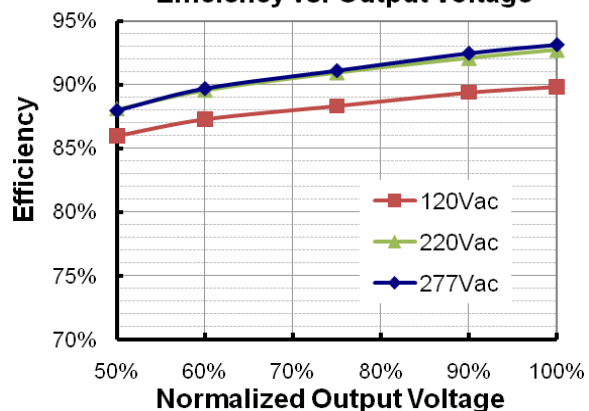


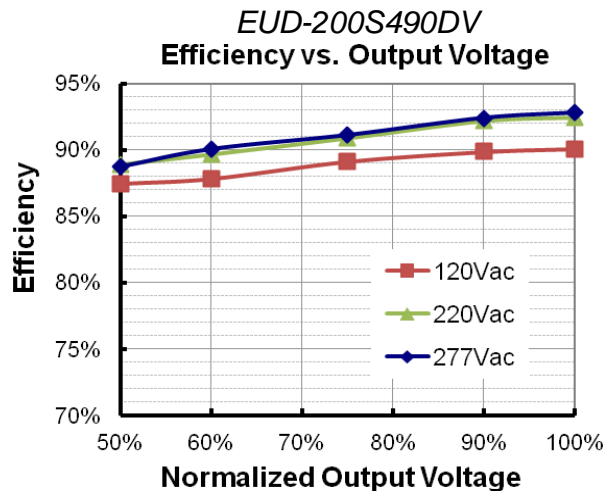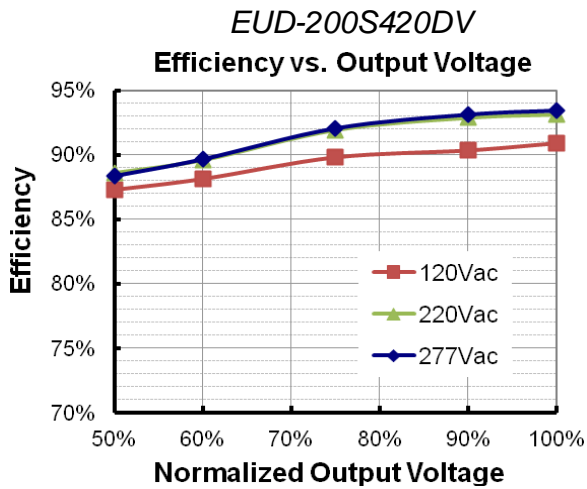

## Power Factor

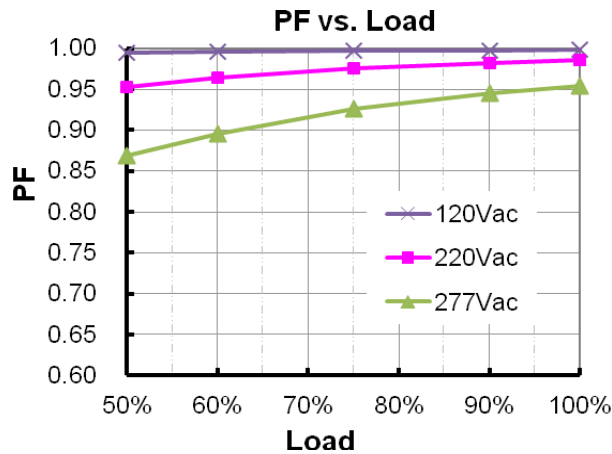

## Total Harmonic Distortion

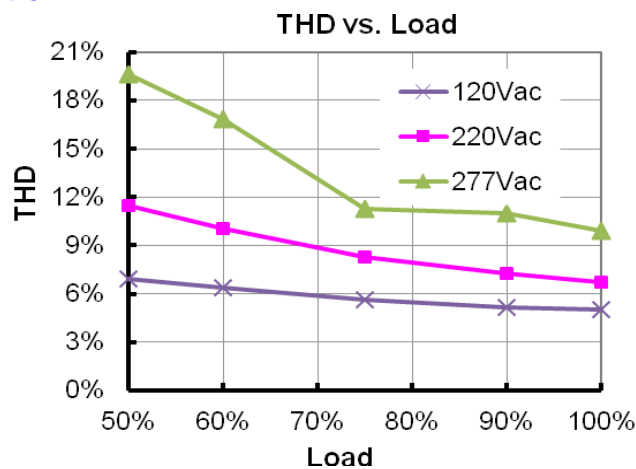


## Protection Functions

Parameter	Notes
Over Temperature Protection	Decreases output current, returning to normal after over temperature is removed.
Short Circuit Protection	Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.
Over Voltage Protection	Limits output voltage at no load and in case the normal voltage limit fails.

## Dimming

### ● 0-10V Dimming

The recommended implementation of the dimming control is provided below.

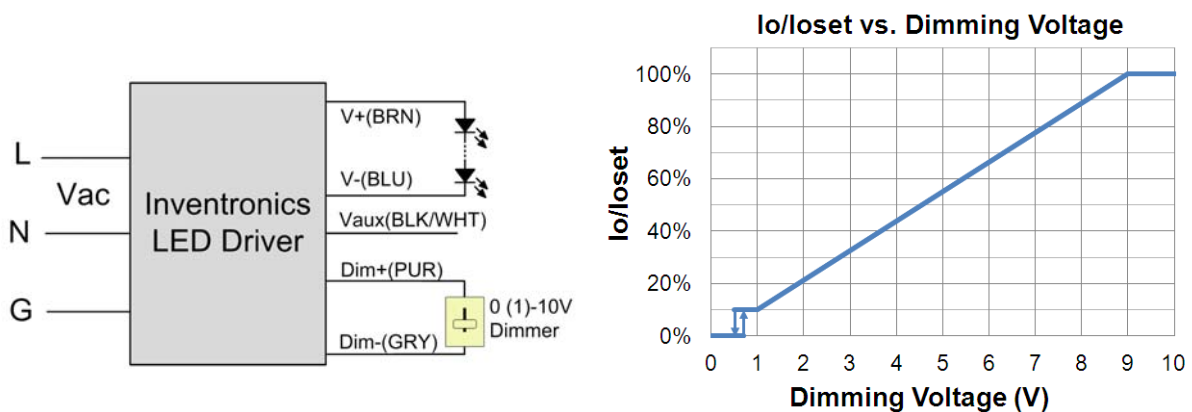


Implementation 1: DC Input

#### Notes:



1. The dimmer can also be replaced by an active 0-10V voltage source signal or passive components like resistors and zener.
1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. If 0-10V dimming is not used, Dim + should be open.

### ● PWM Dimming

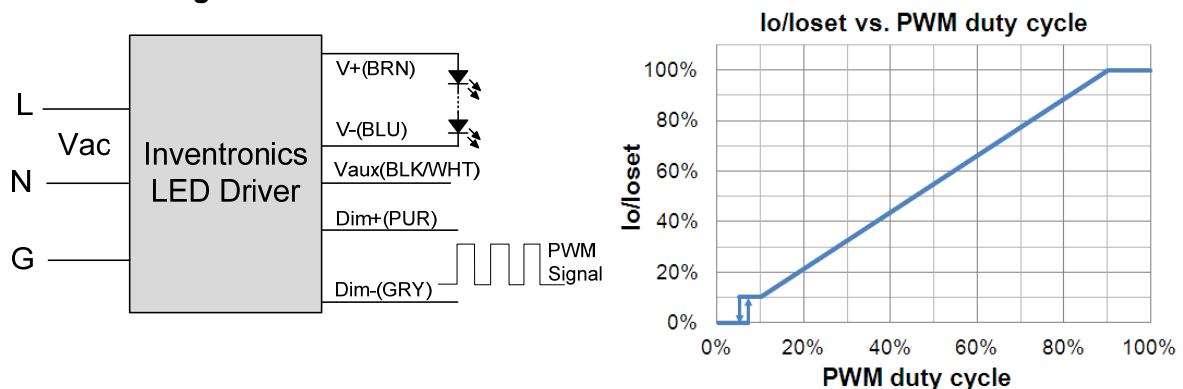

Implementation 2: Positive logic



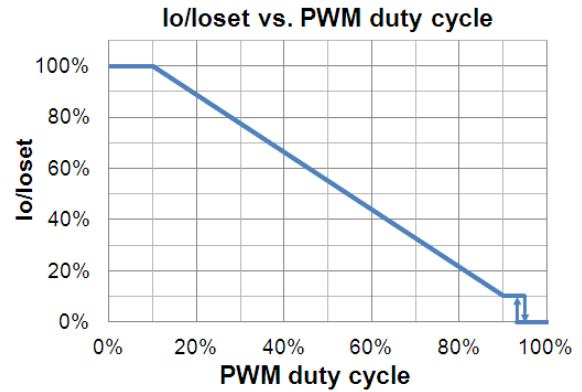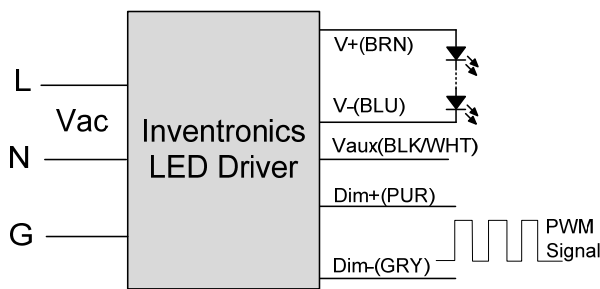


Implementation 3: Negative logic

● Time Dimming

Set the timing curve by pulling the sliders.


## Programming Connection Diagram

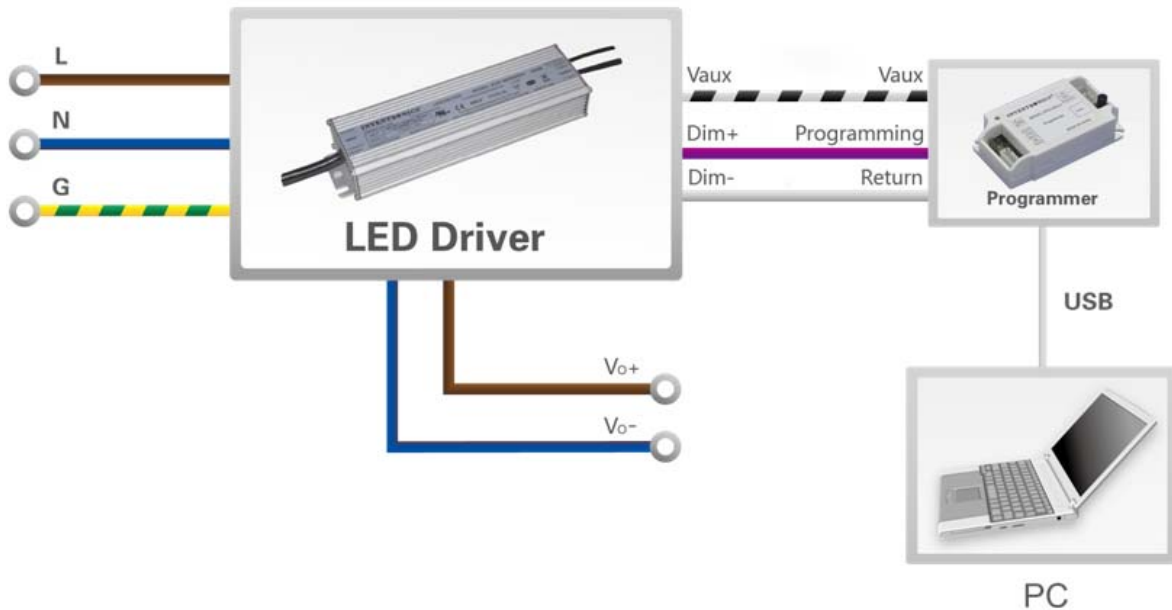

**Note:** The driver does not need to be powered on during the programming process.

- Please refer to [PRG-MUL2 Multi-Programmer datasheet](#) for details.

## Mechanical Outline

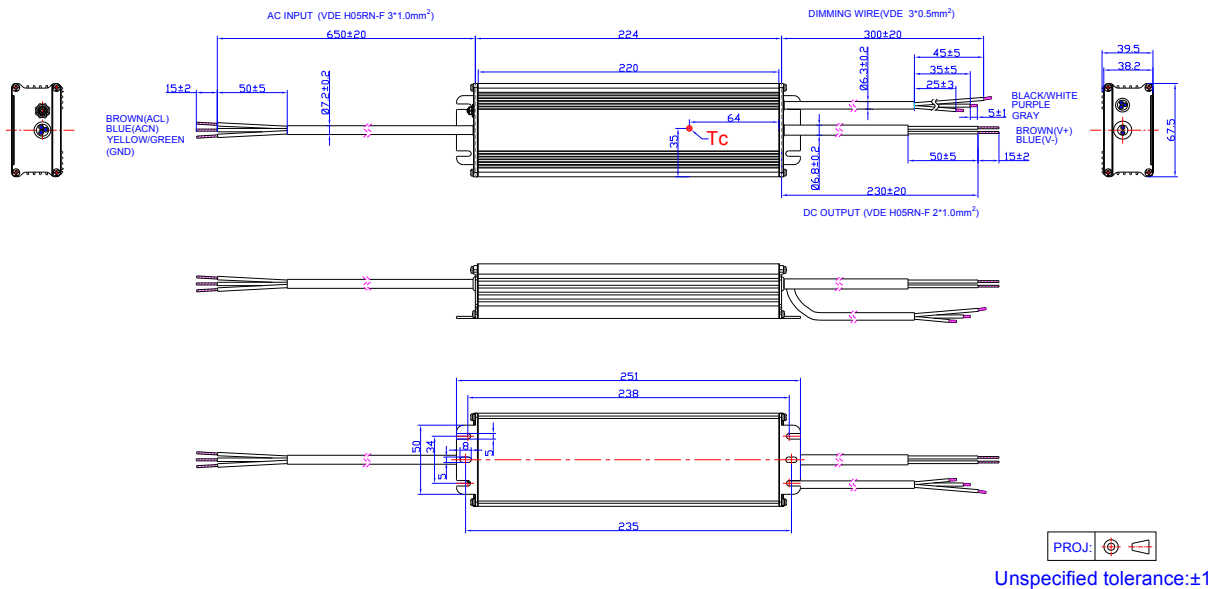

## RoHS Compliance

Our products comply with the European Directive 2011/65/EC, calling for the elimination of lead and other hazardous substances from electronic products.

## Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2015-03-13	A	Datasheets Release	/	/
2015-06-01	B	Description	/	Updated
		Models	/	Updated
		Mechanical Outline	/	Updated
2016-03-31	C	KS	/	Added
		General Specifications	With mounting ear	Updated
		Safety & EMC Compliance	/	Updated
2017-03-01	D	Leakage Current	/	Updated
		Inrush Current(I <sup>2</sup> t)	/	Updated
		Mechanical Outline	/	Updated