


SOL Driver Data sheet

Part No./: SDC-4B-350



SDC-4B-350

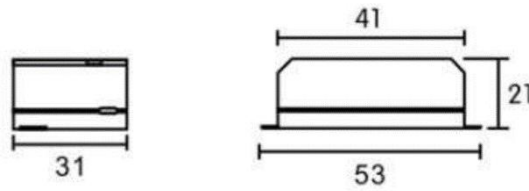

Feature

Protections :	Open Circuit,Over Load
Under Voltage,Over Temperature	
IP Grade :	IP67
Start Time :	< 0.5S(Full load)
Ambient Temp :	-20—50℃
Surge Standard :	EN61000-4-5
Safety Regulations :	EN61347-1,EN61347-2-13
EMC Regulations :	EN655015,EN61000-3-3
Install Way :	Independent,Built-in
Customer' s Requirements :	Custom—Made Different Voltage or Current

Performance Parameters

Model	Input Voltage	Rated Load	Output Current	Output Voltage	Efficiency (Full Load)	Power Factor(Full Load)
SDC-4B-350	100-240V	4W	350mA	3-12V	73%	0.5