



SOL Driver Data sheet

Part No./: SLD-MW600-690

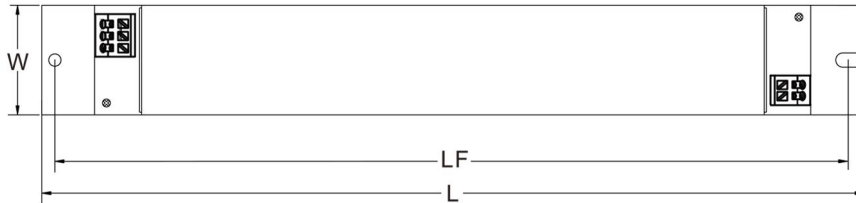

SLD-MW600-690



LF1=165mm

Size: L178*W31*H23

Feature

Protections :	Over Voltage,Short Circuit
IP Grade :	IP20
Start Time :	< 500ms@230V
Ambient Temp :	-20—50℃
Surge Standard :	EN61000-4-5
Certification:	CE RoHS
Surge Protection :	1KV
Install Way :	Independent, built-in
Customer' s Requirements :	Custom—Made Different Voltage or Current
LED Driver:	flicker free

Performance Parameters

Model	Input Voltage	Rated Load	Output Current	Output Voltage	Efficiency (Full Load)	Power Factor(Full Load)
SLD-MW600-690	200-240V	58W	690mA	DC60-85	88%	0.9