

Part No./: <u>SOL-LS5050-4H1-120</u>

Product Specification

Product Class: LED LENS

Item No:SOL-LS5050-4H1-120

Material: PC (UV)

Certification: RoHS



Part No./: <u>SOL-LS5050-4H1-120</u>

Content

Specification	3
2D Drawing	-4
Optical Datasheet	-5
Packing	-6
Application Notes	7



Part No./: <u>SOL-LS5050-4H1-120</u>


Specification

Item No	Picture	Size	Matched LED	Lighting Application
				Тррпомпон
	00	Diameter:		
SOL-LS5050-4H1-120		49.89mm	3535	Streetlight
		Height:6.89mm		
		FWHM:120*60°		



Part No./: <u>SOL-LS5050-4H1-120</u>

Drawing

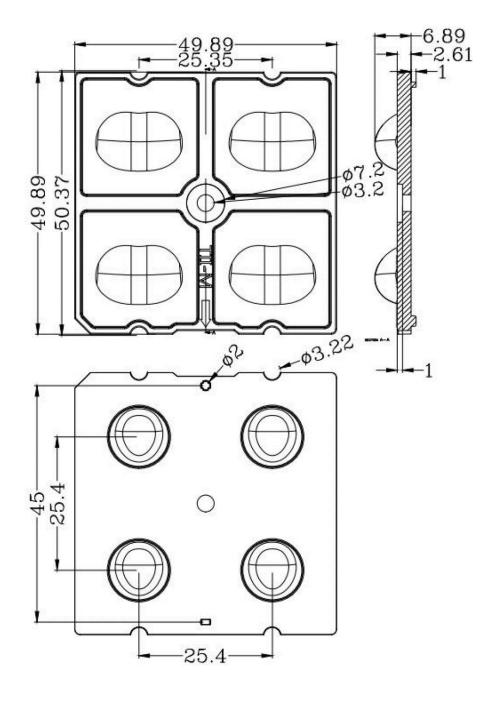





Part No./: <u>SOL-LS5050-4H1-120</u>

Optical Test Report

配光曲线

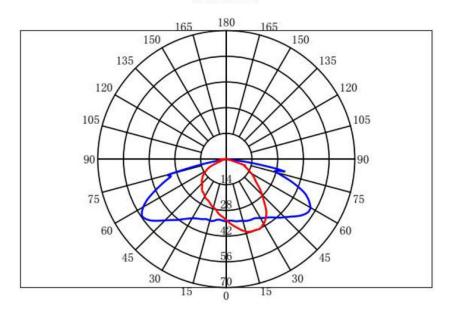

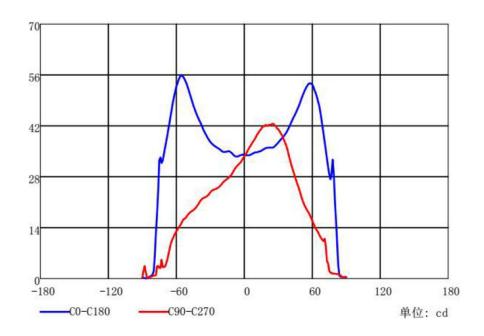




Part No./: <u>SOL-LS5050-4H1-120</u>

Packing

Material	Size	Packing Instruction	
Blank paper	Blank paper		
Plastic bag	150*120mm	40DCC/1 D	
White Paperboard	150*115mm	48PCS/1 Box 24 Box/1 Carton	
Box	158*120*80mm	24 BOX/1 Carton	
Carton	A=B 505*330*255mm		

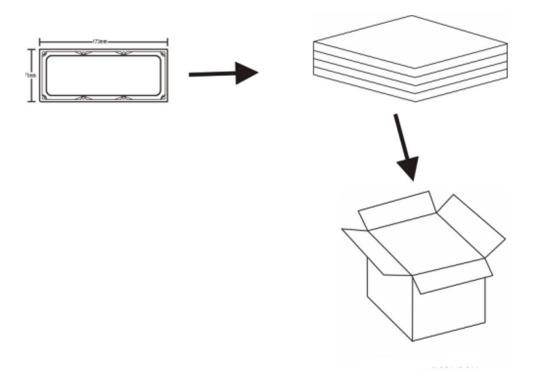



Part No./: SOL-LS5050-4H1-120

Application Notes

- (1) Please use a litter water and soft fabric (air-laid paper) to clean the product if necessary.
 - (2) Forbid to use industrial solvent to clean the product, such as alcohol.
 - (3) The working temperature is $-35^{\circ}\text{C} \sim +120^{\circ}\text{C}$.
 - (4) Storage environment temperature is 0°C~40°C, humidity is 30%~95%.
- (5) The product has the function to change the ray of light, it is made of optical material, the effect shall be influenced once pollute. Please do not open the packing before use it, to avoid the dust pollution.
- (6) Protect the product from the sun and other ultraviolet ray, as these will lead to aging, change color, crack, etc.
 - (7) Please ware gloves once install the product, avoid to abrasion the product surface.
- (8) Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.

Thank You!

