

Part No./: <u>SOL-LS5050-4H1-157</u>

# **Product Specification**

**Product Class: LED LENS** 

Item No:SOL-LS5050-4H1-157

Material: PC (UV)

Certification: RoHS



Part No./: <u>SOL-LS5050-4H1-157</u>

### **Content**

Specification	-3
2D Drawing	-4
Optical Datasheet	-5
Packing	-6
Application Notes	7



Part No./: <u>SOL-LS5050-4H1-157</u>


# **Specification**

Item No	Picture	Size	Matched LED	Lighting Application
SOL-LS5050-4H1-135		Diameter: 49.89mm Height:7.11mm FWHM:157*57°	3535	Streetlight



Part No./: <u>SOL-LS5050-4H1-157</u>

# **Drawing**

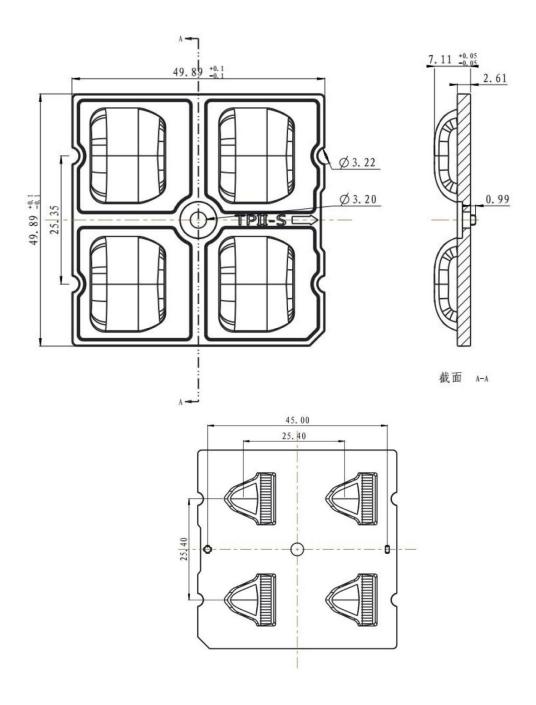





Part No./: <u>SOL-LS5050-4H1-157</u>

## **Optical Test Report**

#### 配光曲线

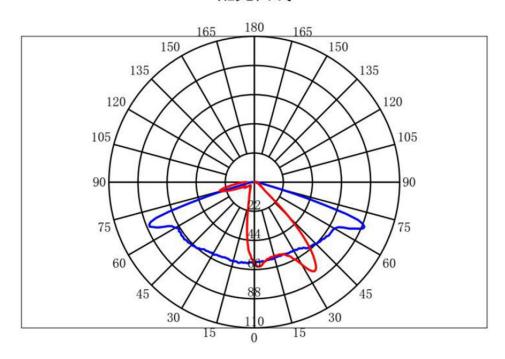

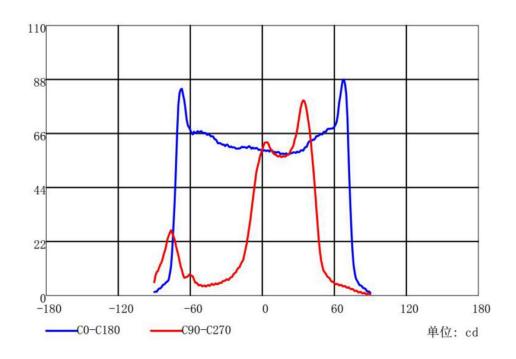




Part No./: <u>SOL-LS5050-4H1-157</u>

# **Packing**

Material	Size	Packing Instruction	
Blank paper	Blank paper		
Plastic bag	150*120mm	48PCS/1 Box 24 Box/1 Carton	
White Paperboard	150*115mm		
Box	158*120*80mm		
Carton	A=B 505*330*255mm		

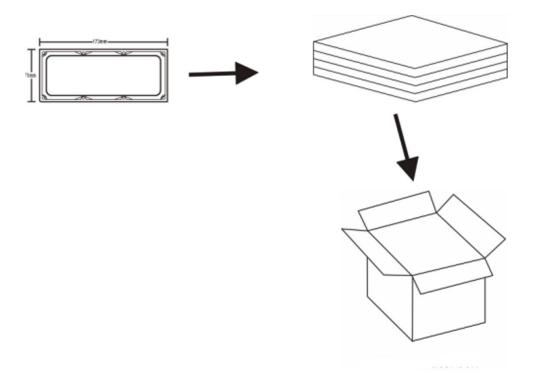



Part No./: SOL-LS5050-4H1-157

### **Application Notes**

- (1) Please use a litter water and soft fabric (air-laid paper) to clean the product if necessary.
  - (2) Forbid to use industrial solvent to clean the product, such as alcohol.
  - (3) The working temperature is  $-35^{\circ}\text{C} \sim +120^{\circ}\text{C}$ .
  - (4) Storage environment temperature is 0°C~40°C, humidity is 30%~95%.
- (5) The product has the function to change the ray of light, it is made of optical material, the effect shall be influenced once pollute. Please do not open the packing before use it, to avoid the dust pollution.
- (6) Protect the product from the sun and other ultraviolet ray, as these will lead to aging, change color, crack, etc.
  - (7) Please ware gloves once install the product, avoid to abrasion the product surface.
- (8) Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.

Thank You!

