


# Connector Data sheet

Part No./: SOL-MC308



SOL-MC308

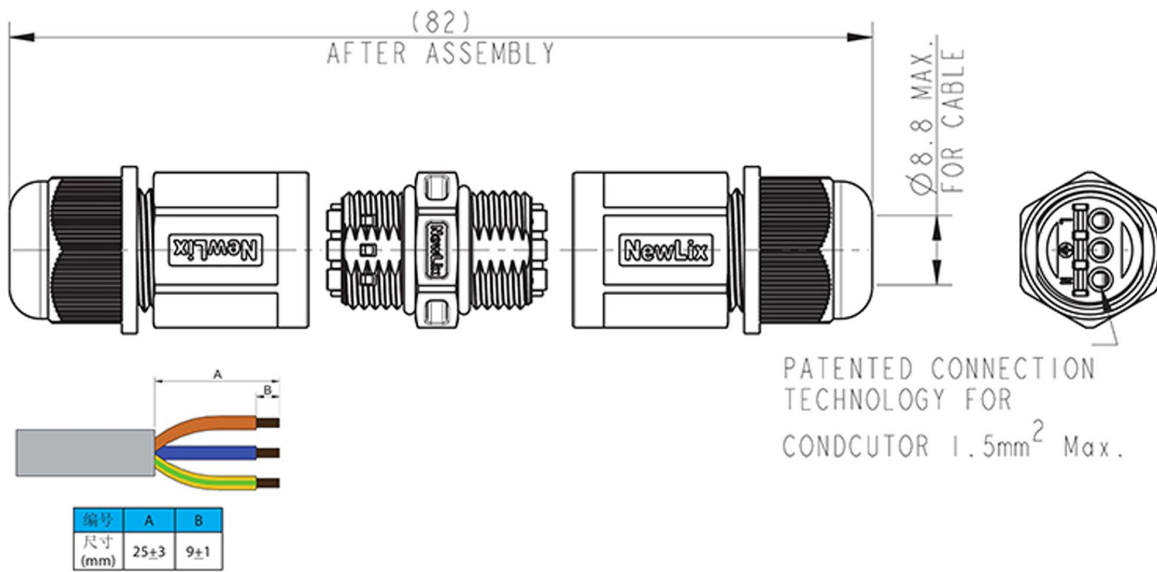

Part Number	SOL-MC308		
Termination	Miniature fast shrapnel	Overvoltage category	III
Wire gauge	0.5-1.5mm <sup>2</sup>	Insulation resistance	≥100MΩ
Rated volate	300V	Operating temperature	-40—105°C
Rated current	16A	IP degree protection	IP68/IP69K
Rated impulse withstand voltage	2500V	Flammability	UL94-V0
Polution degree	3	RoHS compliant	YES